



1.3 Megapixel 720p Weatherproof Dome Camera Equipped with IR LED



Key Features

- High-performance CMOS image sensor.
- Vari Focal : 2.8 - 12 mm
- H.264 & MJPEG dual-stream encoding
- 30fps@1.3 M (1280 × 960) & 30fps@720p (1280 × 720).
- Support ICR for day time and night time operation.
- Max. IR LEDs length 20 m.
- IP66 rated water and dust resistant.
- PoE.

Appearance

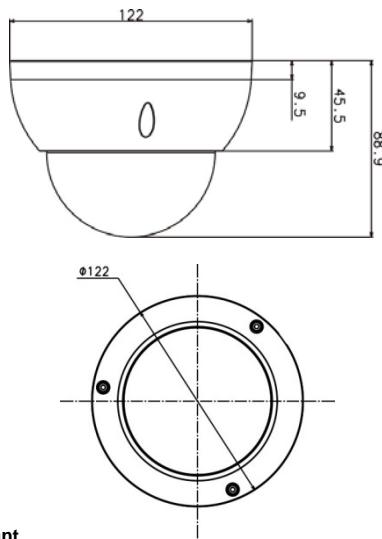

Specifications

Camera	
Image Sensor	Approx. 1/3 type CMOS image sensor
Min Illumination	0.1 lx / F1.4 (color)*, 0 lx (IR on) ^{*1}
Gain	Auto/ Manual
Back light compensation	BLC/ HLC/ WDR
Shutter speed	Auto/ Manual, 1/3 sec~1/100000 sec
Day / Night	Auto(ICR) / Color/ Black & White
IR LED Light	Irradiation distance: 20 m
White Balance	Auto/ Manual
Digital Noise Reduction	3DNR ON/ OFF
Privacy masking	Up to 4 areas
Video Motion Detection	On/ Off
Lens	
Focal Length	2.8 – 12 mm
Angular Field of View	H: 28°(TELE) to 92° (WIDE) V: 17°(TELE) to 28°(WIDE)
Network	
Network	10BASE-T/ 100BASE-TX, RJ45 connector
Resolution	1.3 M (1280x960) / 720P (1280x720)/ D1 (704x576/704x480) / CIF (352x288/352x240)
Image compression method	H.264/ MJPEG
Frame Rate	1 to 30 fps
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF compatible
Maximum concurrent access number	20 users (Number of sessions that can connect to cameras at the same time)
General	
Safety	UL(UL60950-1),C-UL(CAN/CSA C22.2 No.60950-1), IEC60950-1
EMS	FCC(Part15 ClassA), ICES003 ClassA, EN55022 ClassB, EN55024
Power source	12 V DC, PoE (IEEE802.3af compliant)
Power Consumption	12 V DC: 590 mA / Approx. 7.1 W PoE 48 V DC: 150 mA / Approx. 7.2 W (Class 0 device)
Ambient Operating Temperature / Humidity	-30 °C to +60 °C {-22 °F to 140 °F} 10 % to 95 % (no condensation)
Water and Dust Resistance	Main body: IP66
Vandal Resistant	IK10
Dimensions	Φ122 mm × 89 mm (H) {ø4-26/32 inches × 3-1/2 inches (H)}
Weight (approx.)	Approx. 500 g {1.1 lbs}

*1 [Image Adjust] Shutter: (0-)80 ms, Gain: (0-)50"

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.

DISTRIBUTED BY: